



FCC Supplier's Declaration of Conformity (SDoC) Test Report

For

DexForce Technology Co., Ltd.

DexSense 3D industrial camera

Test Model: DF-XEMA-L-1803

Additional Models : please refer to Model list

Prepared for : DexForce Technology Co., Ltd.
Room 512, Building 4, Software Industry Base, No. 19, 17, 18,
Address : Haitian First Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen

Prepared by : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.
Address : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Tel : (+86)755-29871520
Fax : (+86)755-29871521
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 13, 2023
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 13, 2023 - April 21, 2023
Date of Report : April 21, 2023



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

**FCC SDoC TEST REPORT****CFR47 FCC Part 15 Subpart B**

Radio Frequency Devices - Unintentional Radiators

Report Reference No : LCSB032023108E

Date of Issue..... : April 21, 2023

Testing Laboratory Name..... : **Shenzhen Southern LCS Compliance Testing Laboratory Ltd.**

Address..... : 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street,Guangming District, Shenzhen, China.

Testing Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name.....** : **DexForce Technology Co., Ltd.**

Address..... : Room 512, Building 4, Software Industry Base, No. 19, 17, 18, Haitian First Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen

Test Specification:Standard : CFR47 FCC Part 15 Subpart B
ANSI C63.4-2014

Test Report Form No. : SLCSEMC-2.3

TRF Originator : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2016-08

Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test..... : **DexSense 3D industrial camera**Trademark : 

Test Model/Type : DF-XEMA-L-1803

Rating : See Model List

Results : **PASS****Compiled by:**

Ella Huang / Engineer

Supervised by:

Amy Liu / Technique Director

Approved by:

Dm Gu / Manager



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



FCC SDoC - TEST REPORT

Test Report No.....: LCSB032023108E

Applicant.....: DexForce Technology Co., Ltd.
Room 512, Building 4, Software Industry Base, No. 19, 17, 18,
Address.....: Haitian First Road, Binhai Community, Yuehai Street, Nanshan
District, Shenzhen
Telephone.....: /
Fax.....: /

Manufacturer: DexForce Technology Co., Ltd.
Room 512, Building 4, Software Industry Base, No. 19, 17, 18,
Address.....: Haitian First Road, Binhai Community, Yuehai Street, Nanshan
District, Shenzhen
Telephone.....: /
Fax.....: /

Factory.....: DexForce Technology Co., Ltd.
Room 512, Building 4, Software Industry Base, No. 19, 17, 18,
Address.....: Haitian First Road, Binhai Community, Yuehai Street, Nanshan
District, Shenzhen
Telephone.....: /
Fax.....: /

The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 75%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/product series standard.

POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

☒ Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
☐ Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	April 21, 2023	Initial Issue	-

Remark:
000) : “---”





TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1.1. General Description of The Item(s).....	6
1.2. Operating Mode(s) Used of Tests.....	7
1.3. Support / Auxiliary Equipment For The EUT	7
1.4. Description of Test Facility	7
2. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
3. MEASURING DEVICES AND TEST EQUIPMENT	9
4. VERDICT SUMMARY SECTION	9
4.1. Standard(s).....	10
4.2. Overview of Results.....	10
5. EMISSION TESTS	11
5.1. Conducted Disturbance.....	11
5.2. Radiated Disturbance	12
ANNEX A - TEST RESULTS	14
ANNEX B - TEST PHOTOS	18
ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT	19



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	DexSense 3D industrial camera
Test Model/Type	DF-XEMA-L-1803
Additional Models/Type	See Model list
Description of Model difference	See Model list
Rating	See Model list
Classification of device	☐ Class A ☒ Class B

Information of the Equipment Under Test(EUT)

Model List:

Declared by applicant as follows:

- All models of drives use the same circuit and PCB layout.
- All models have similar appearance and structure except dimension.
- This report after information review and verification, the model “DF-XEMA-L-1803” were chosen as the representative model to perform all the tests.

Model	Rating	Dimension(mm)
DF-XEMA-L-1803	Input: AC100-240V, 50/60Hz, 1.6A, Max; 76.8W Output: DC24V, 3.2A	433x133x51
DF-XEMA-L-1805		
DF-XEMA-L-1806		
DF-XEMA-P-1201		126x146x61
DF-XEMA-P-1202		
DF-XEMA-P-1203		
DF-XEMA-S-806-F80		207x1227.5x50.5
DF-XEMA-S-806		
DF-XEMA-S-808		
DF-XEMA-S-809		





1.2. OPERATING MODE(S) USED OF TESTS

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing
1	Normal operation	☒
2	Bluetooth	☐
3	HDMI	☐
4	Full load	☐

1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/Type	Manufacturer	Supplied by
--			

1.4. DESCRIPTION OF TEST FACILITY

Test Location	Shenzhen Southern LCS Compliance Testing Laboratory Ltd. 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
Date of receipt of test item	April 13, 2023
Date(s) of performance of test	April 13, 2023 - April 21, 2023





2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty (U_{lab})	Uncertainty (U_{cisp})
Conducted disturbance (9kHz - 150kHz)	± 1.40 dB	± 4.0 dB
Conducted disturbance (150kHz - 30MHz)	± 2.80 dB	± 3.6 dB
Radiated disturbance (30MHz - 200MHz)	± 4.66 dB	± 5.2 dB
Radiated disturbance (200MHz - 1GHz)	± 4.64 dB	± 5.0 dB

Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.





3. MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2022-05-05	2023-05-04
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2022-05-05	2023-05-04
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2022-05-05	2023-05-04
4	EMI Test Software	EZ	EZ_EMC	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2022-05-05	2023-05-04
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2022-05-05	2023-05-04
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

RADIATED DISTURBANCE (above 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2022-05-05	2023-05-04
3	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2022-05-08	2025-05-07
4	Coupling Decoupling Network	SCHWARZBECK	CDNE M2	00251	2022-10-13	2023-10-12
5	Coupling Decoupling Network	SCHWARZBECK	CDNE M3	00248	2022-10-13	2023-10-12
6	EMI Test Software	EZ	EZ_EMC	N/A	/	/
7	Controller system	KGS	M4U450	/	/	/





4. VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results. Refer the next chapter for details of measured test results and applied test levels.

4.1. STANDARD(S)

CFR47 FCC Part 15 Subpart B - Radio frequency devices Subpart B - Unintentional radiators.

ANSI C63.4-2014 - American national standard for methods of measurement of radio noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.

4.2. OVERVIEW OF RESULTS

EMISSION TESTS - CFR47 FCC Part 15 Subpart B		
Requirement - Test case	Limit	Verdict
Conducted Disturbance	Clause 15.107	PASS
Radiated Disturbance	Clause 15.109	PASS

Supplementary information : ---





5. EMISSION TESTS

5.1. CONDUCTED DISTURBANCE

Standard	CFR47 FCC Part 15 Subpart B
Referenced Standard(s)	ANSI C63.4-2014

Disturbance voltage limits at AC power ports of Class B equipment

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 0,5	66 - 56	56 - 46	9 kHz
0,5 - 5,0	56	46	
5,0 - 30	60	50	



1) At the transition frequency, the lower limit applies.

Disturbance voltage limits at AC power ports of Class A equipment

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 0,5	79	66	9 kHz
0,5 - 30	73	60	

1) At the transition frequency, the lower limit applies.

Test configuration

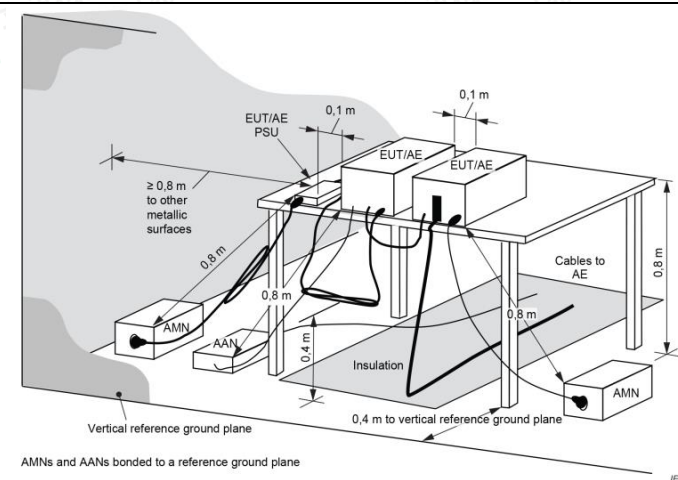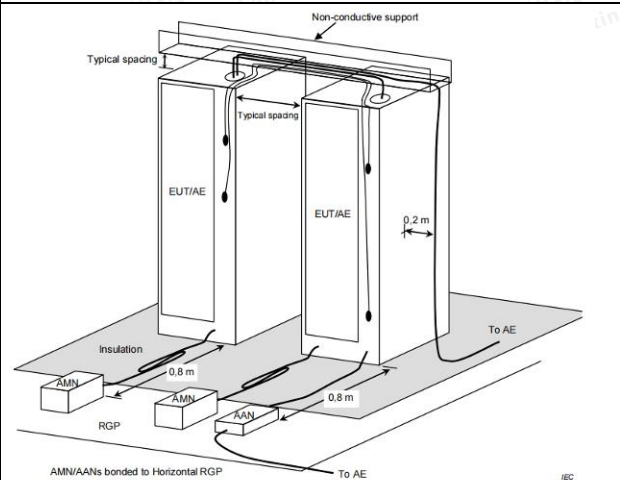Test Setup for table-top	Test Setup for Floor standing
	

Test Procedure Description

For Table-top, EUT shall be placed at $(0,8 \pm 0,05)$ m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at $(0,12 \pm 0,04)$ m above the reference plane of the test site selected for measurement.and connected to the AC mains through artificial mains network (LISN). EUT is powered by V-type artificial power network,and the distance from LISN or is 0,8m. the part of the EUT power cord exceeding 0,8m folds in parallel to form a 0,3-0,4 m eights harness.

Test Results refer to Annex A.1



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



5.2. RADIATED DISTURBANCE

Standard	CFR47 FCC Part 15 Subpart B
Referenced Standard(s)	ANSI C63.4-2014
Test method	Semi Anechoic Chamber (SAC)

SAC Radiated disturbance limit for Class B equipment (3 m distance)


Frequency range [MHz]	Limit: Quasi-peak		IF BW
	[$\mu\text{V/m}$]	[dB($\mu\text{V/m}$)]	
30 - 88	100	40	120 KHz
88 - 216	150	43.5	
216 - 960	200	46	
960 - 1000	500	54	

SAC Radiated disturbance limit for Class A equipment (10 m distance)

Frequency range [MHz]	Limit: Quasi-peak		IF BW
	[$\mu\text{V/m}$]	[dB($\mu\text{V/m}$)]	
30 - 88	90	39	120 KHz
88 - 216	150	43.5	
216 - 960	210	46.5	
960 - 1000	300	49.5	

- 1) At the transition frequency, the lower limit applies.
- 2) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$.

Test configuration

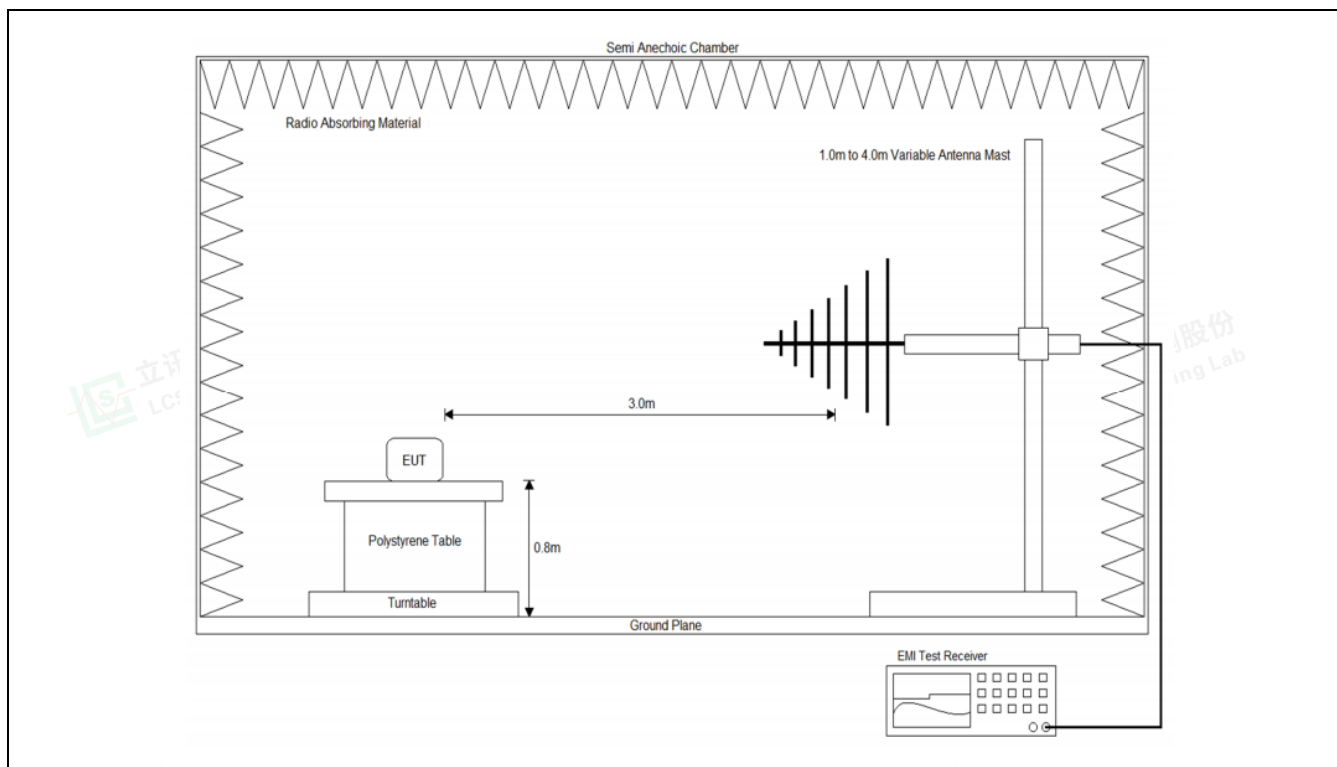



Test Procedure Description

Radiated Emissions were measured 3 metres away from the EUT in the Semi Anechoic Chamber facility, which is an ANSI C63.4 compliant semi-anechoic chamber with ground plane. The EUT was placed on a non-conductive table, at a height of 0.8m above the ground plane. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic antenna or horn antenna is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A.2



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.


Scan code to check authenticity.



ANNEX A - TEST RESULTS

A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	24.0°C, 54% RH
Model	DF-XEMA-L-1803
Operating mode	Mode 1 (worst case)
Test voltage	AC 120V,60Hz
Test engineer	Peng Dong
Pol	Line

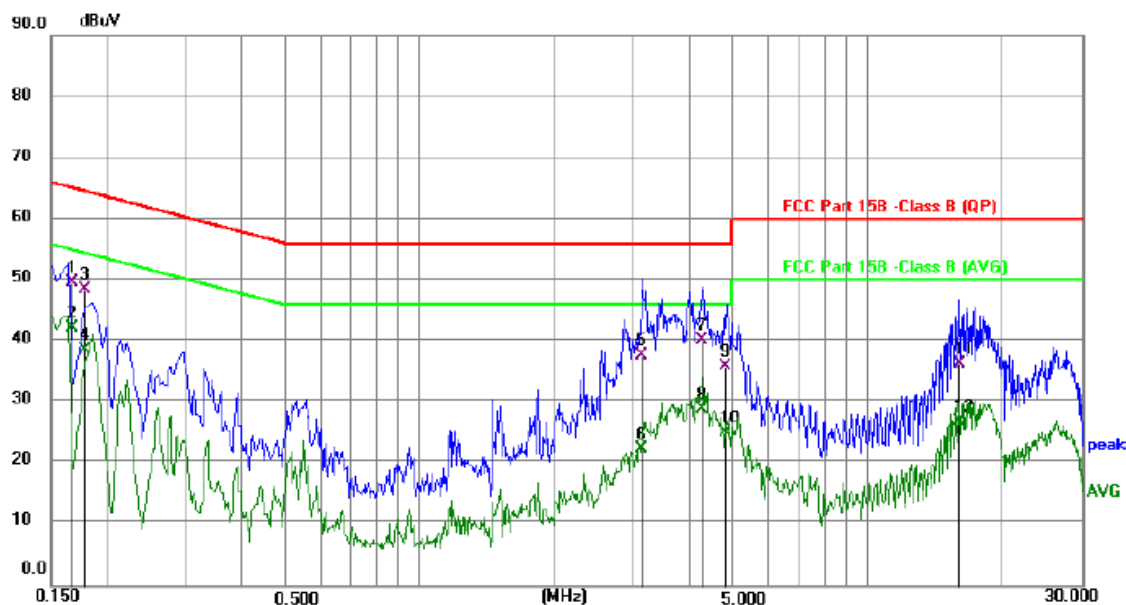


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1679	38.72	10.88	49.60	65.06	-15.46	QP	
2	*	0.1679	31.20	10.88	42.08	55.06	-12.98	AVG	
3		0.1791	37.55	10.88	48.43	64.53	-16.10	QP	
4		0.1791	27.78	10.88	38.66	54.53	-15.87	AVG	
5		3.1171	26.78	11.02	37.80	56.00	-18.20	QP	
6		3.1171	11.41	11.02	22.43	46.00	-23.57	AVG	
7		4.2783	29.16	11.08	40.24	56.00	-15.76	QP	
8		4.2783	17.78	11.08	28.86	46.00	-17.14	AVG	
9		4.8161	24.82	11.08	35.90	56.00	-20.10	QP	
10		4.8161	13.91	11.08	24.99	46.00	-21.01	AVG	
11		16.0233	25.20	11.10	36.30	60.00	-23.70	QP	
12		16.0233	15.68	11.10	26.78	50.00	-23.22	AVG	





Environmental Conditions	24.0℃, 54% RH
Model	DF-XEMA-L-1803
Operating mode	Mode 1 (worst case)
Test voltage	AC 120V,60Hz
Test engineer	Peng Dong
Pol	Neutral

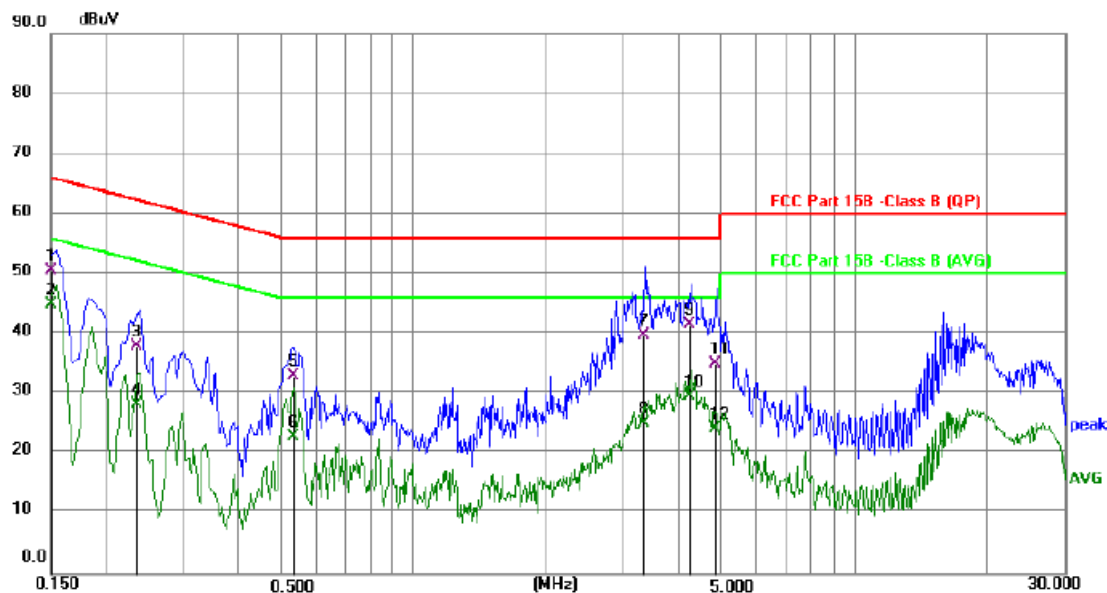


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz			dBuV	dBuV	dB	Detector	Comment
1		0.1507	39.71	10.87	50.58	65.96	-15.38	QP	
2	*	0.1507	34.10	10.87	44.97	55.96	-10.99	AVG	
3		0.2353	27.01	10.89	37.90	62.26	-24.36	QP	
4		0.2353	17.43	10.89	28.32	52.26	-23.94	AVG	
5		0.5338	21.95	10.92	32.87	56.00	-23.13	QP	
6		0.5338	12.01	10.92	22.93	46.00	-23.07	AVG	
7		3.3371	28.66	10.97	39.63	56.00	-16.37	QP	
8		3.3371	14.21	10.97	25.18	46.00	-20.82	AVG	
9		4.2468	30.42	10.99	41.41	56.00	-14.59	QP	
10		4.2468	18.59	10.99	29.58	46.00	-16.42	AVG	
11		4.8680	24.05	11.01	35.06	56.00	-20.94	QP	
12		4.8680	13.26	11.01	24.27	46.00	-21.73	AVG	





A.2. RADIATED DISTURBANCE TEST RESULTS

Environmental Conditions	24.3°C, 56% RH
Model	DF-XEMA-L-1803
Operating mode	Mode 1 (worst case)
Test voltage	AC 120V,60Hz
Test engineer	Peng Dong
Pol	Vertical

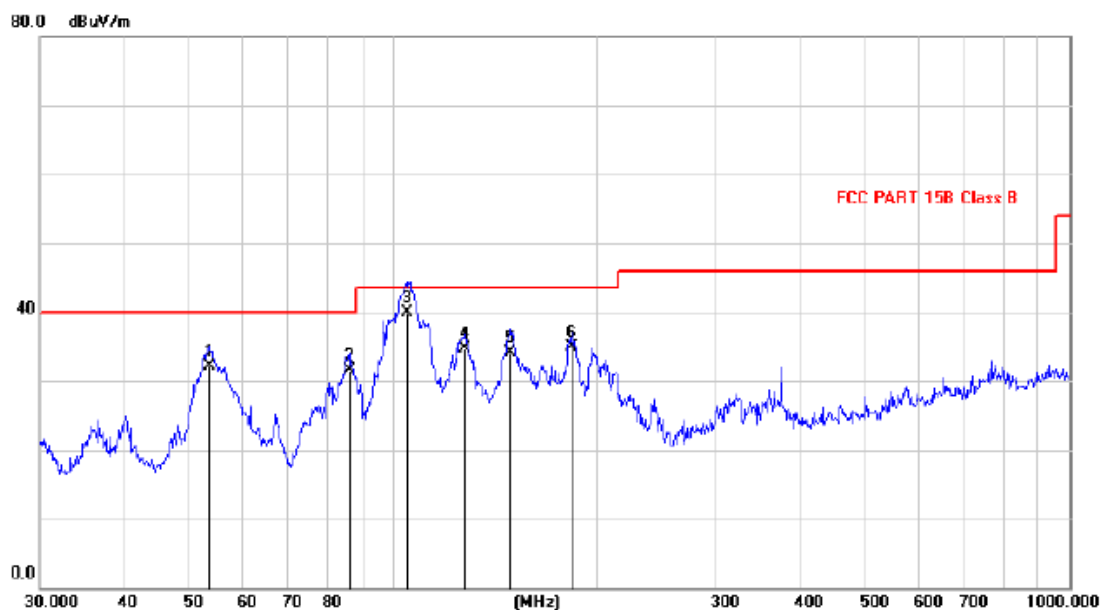

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		53.4583	19.76	12.26	32.02	40.00	-7.98	QP			
2		85.9737	21.36	10.12	31.48	40.00	-8.52	QP			
3	*	104.8113	28.09	11.91	40.00	43.50	-3.50	QP			
4		127.7205	23.75	11.05	34.80	43.50	-8.70	QP			
5		149.0278	23.35	10.75	34.10	43.50	-9.40	QP			
6		183.6024	24.02	10.90	34.92	43.50	-8.58	QP			



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.


101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



Environmental Conditions	24.3°C, 56% RH
Model	DF-XEMA-L-1803
Operating mode	Mode 1 (worst case)
Test voltage	AC 120V,60Hz
Test engineer	Peng Dong
Pol	Horizontal

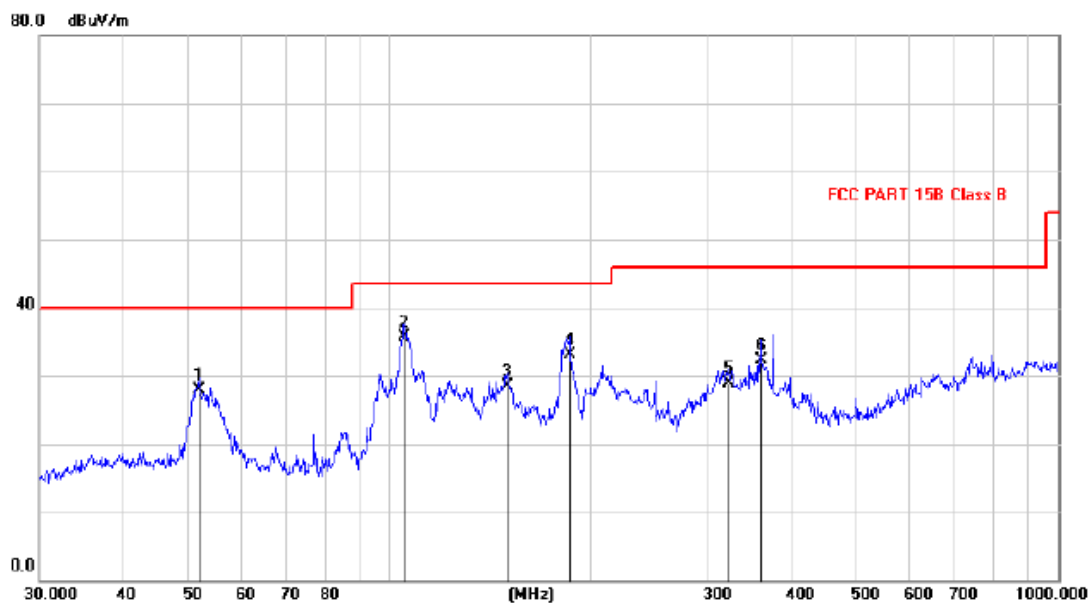

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		51.8658	15.19	12.65	27.84	40.00	-12.16	QP		
2	*	105.3179	23.74	11.95	35.69	43.50	-7.81	QP		
3		150.0108	17.59	10.92	28.51	43.50	-14.99	QP		
4		185.7882	22.18	11.00	33.18	43.50	-10.32	QP		
5		322.8955	14.21	14.78	28.99	46.00	-17.01	QP		
6		360.1319	16.49	15.86	32.35	46.00	-13.65	QP		



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.




ANNEX B - TEST PHOTOS

B.1. Conducted Disturbance

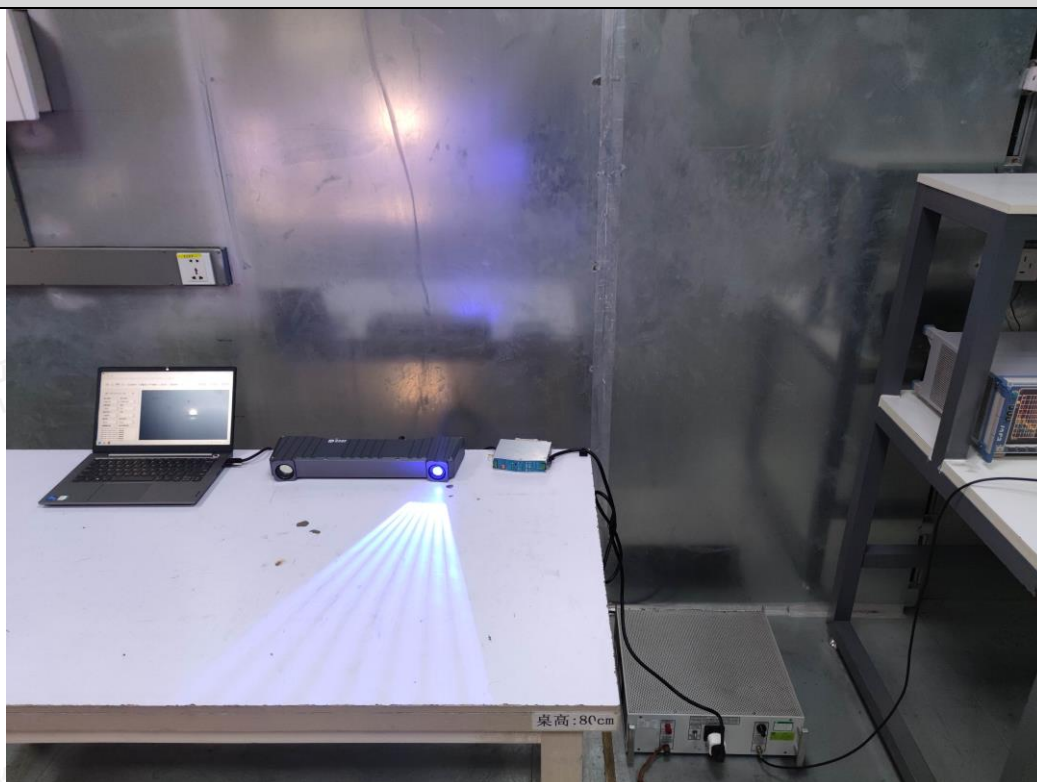

B.2. Radiated Disturbance

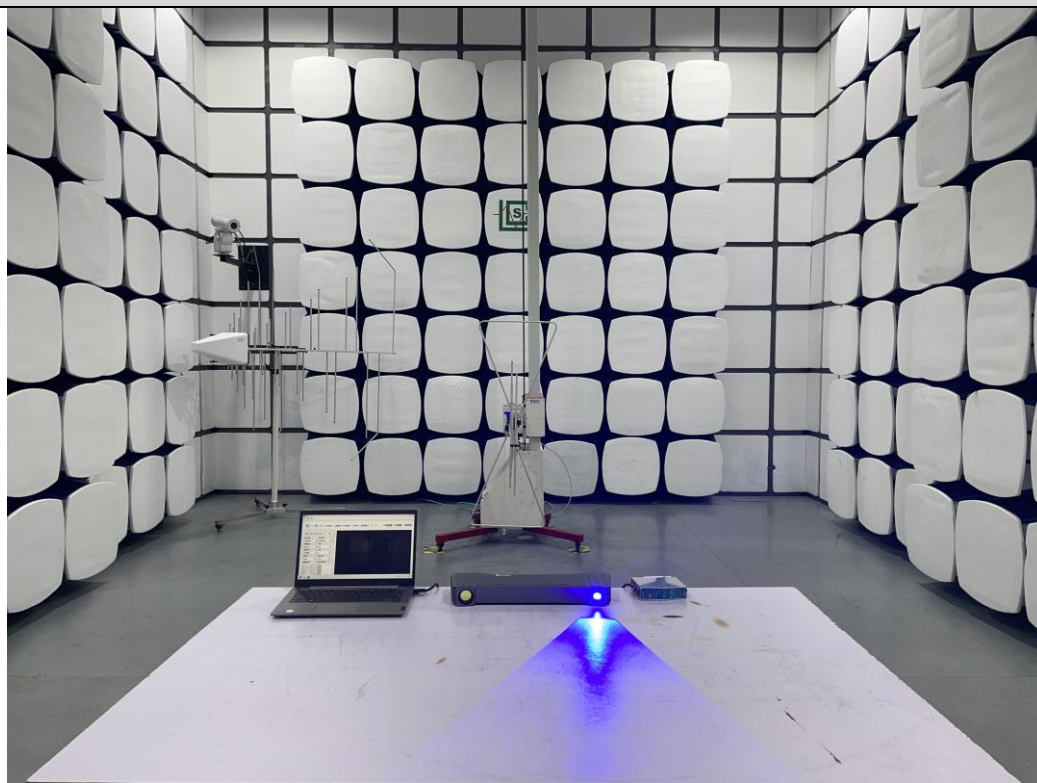

Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT

The photographs show the equipment under test.



Figure. 1 (DF-XEMA-L-1803)

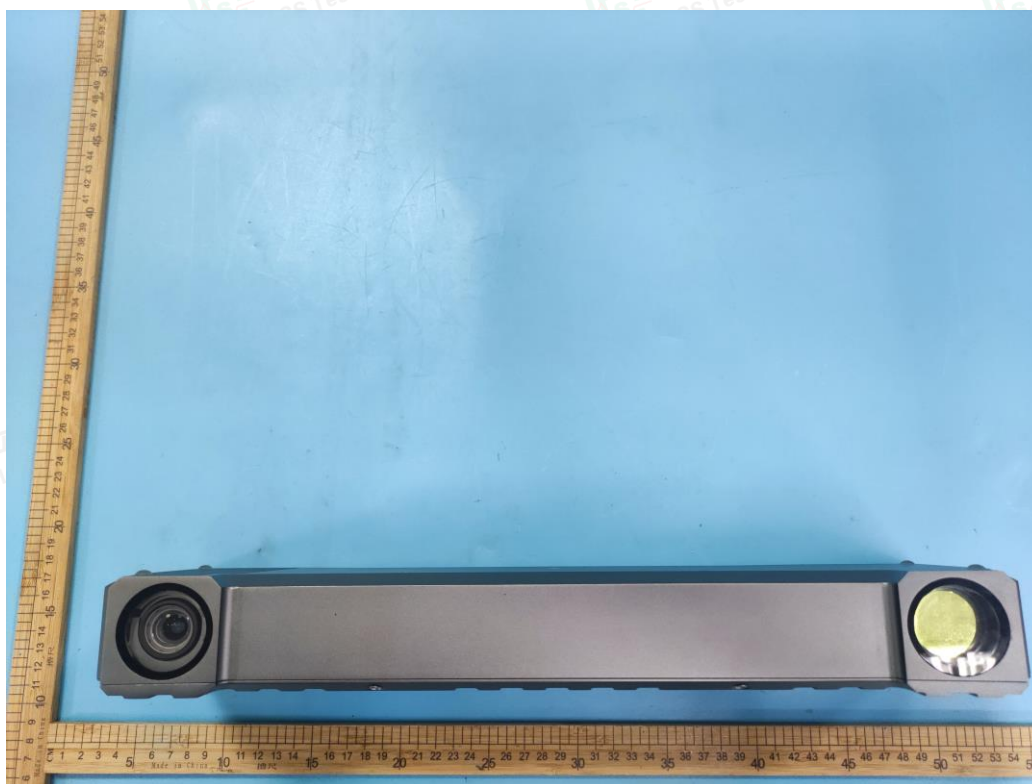


Figure. 2



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

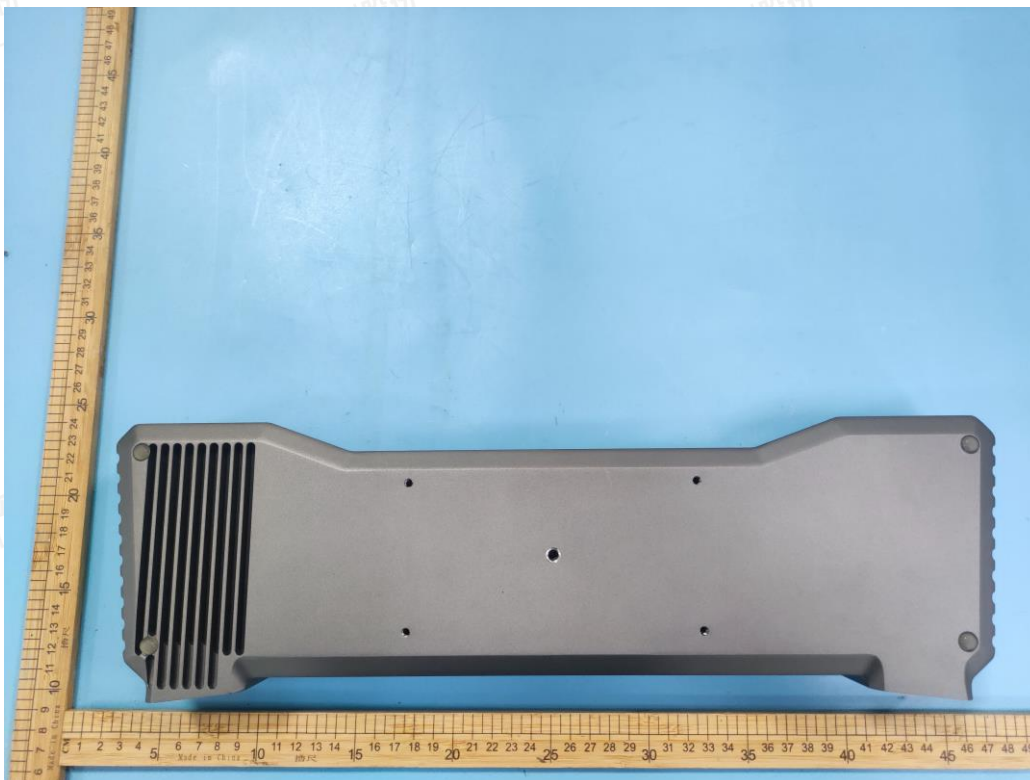


Figure. 3

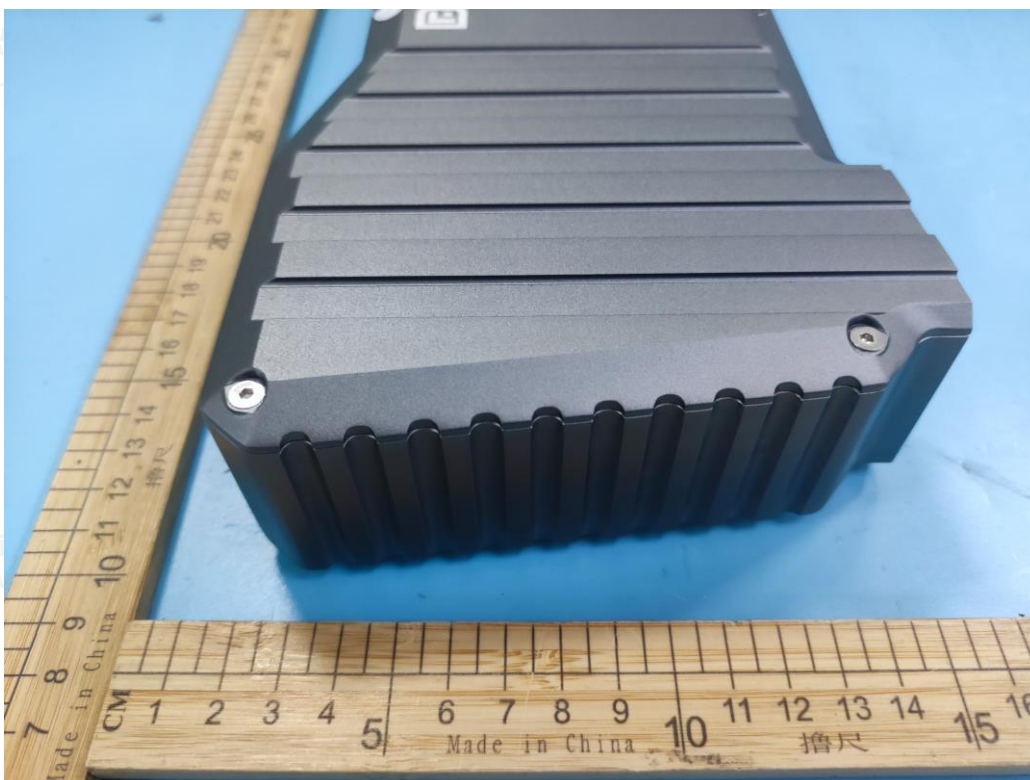


Figure. 4



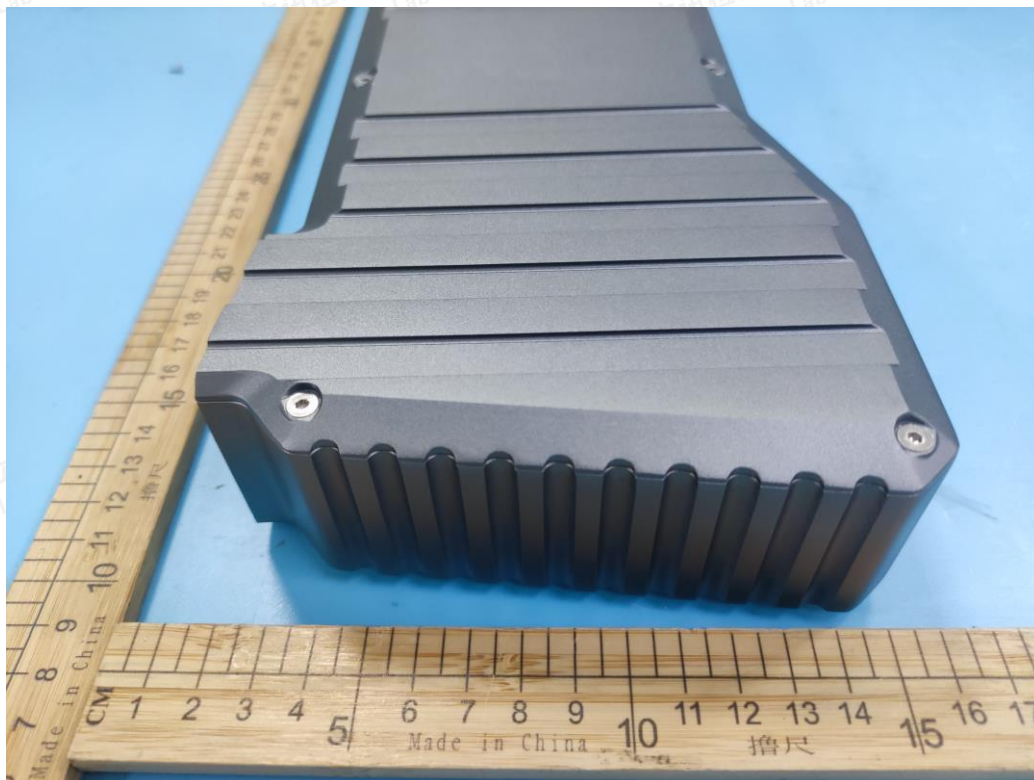


Figure. 5



Figure. 6





Figure. 7

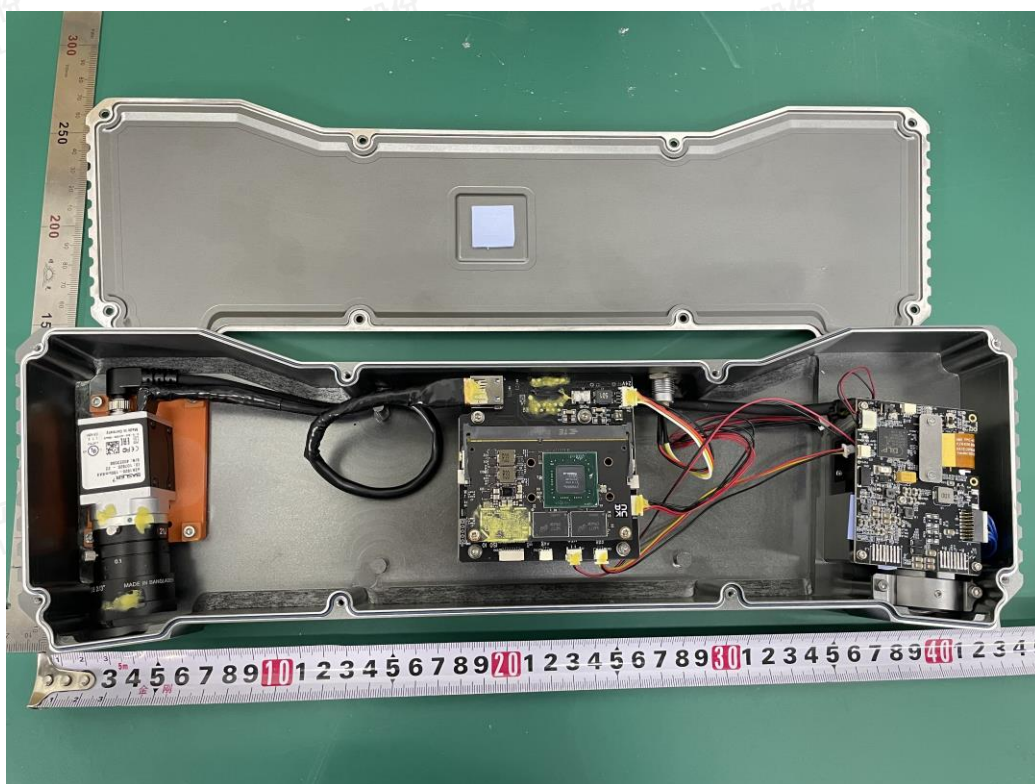


Figure. 8



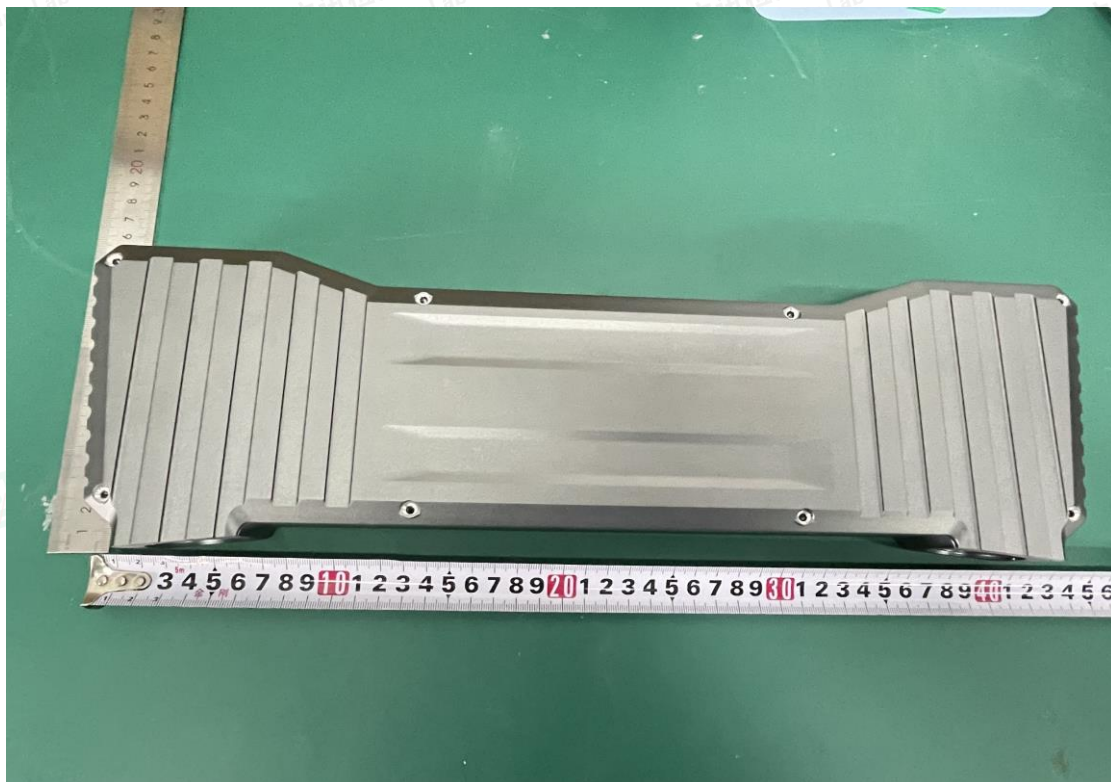


Figure. 9

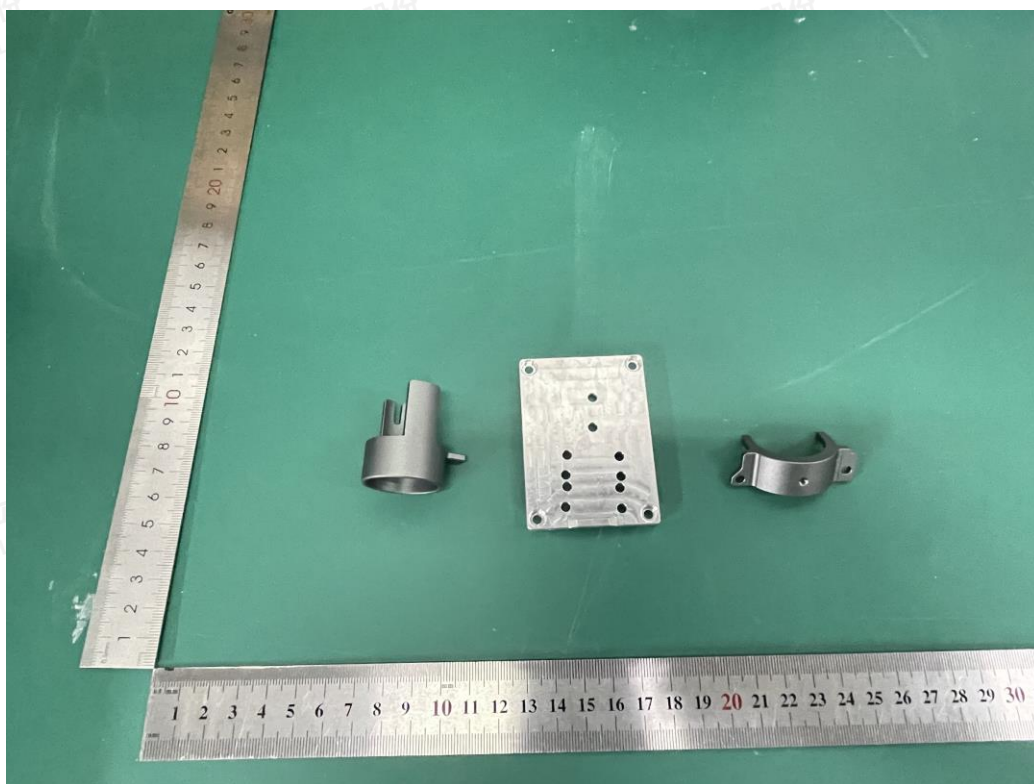


Figure. 10



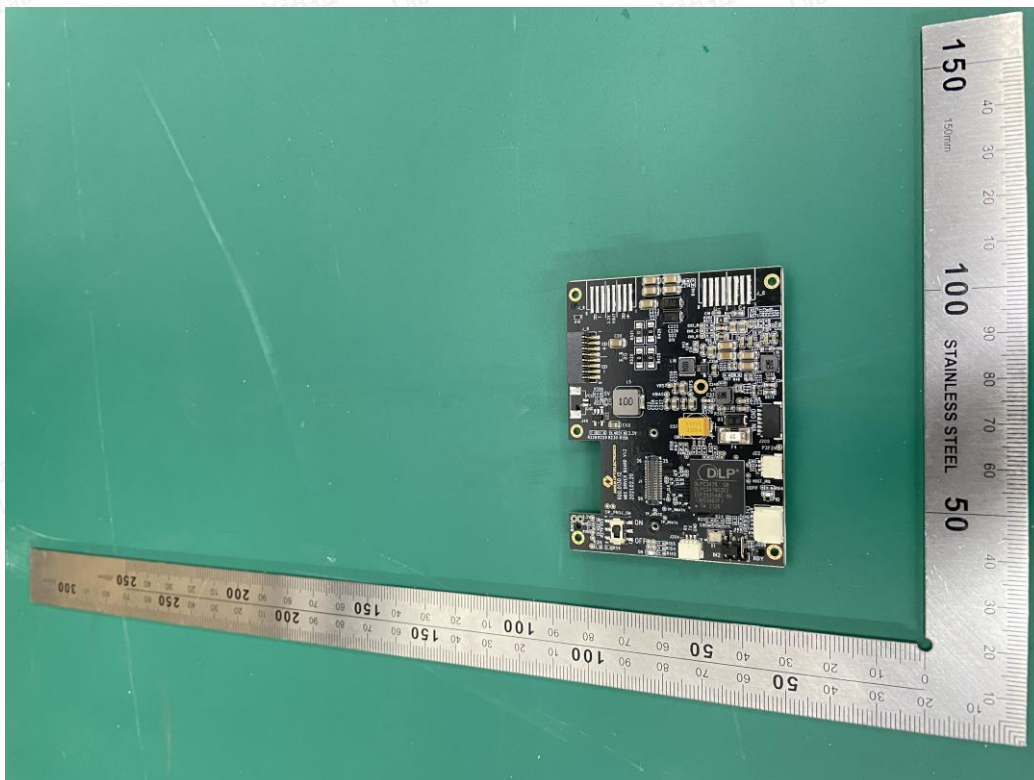


Figure. 11

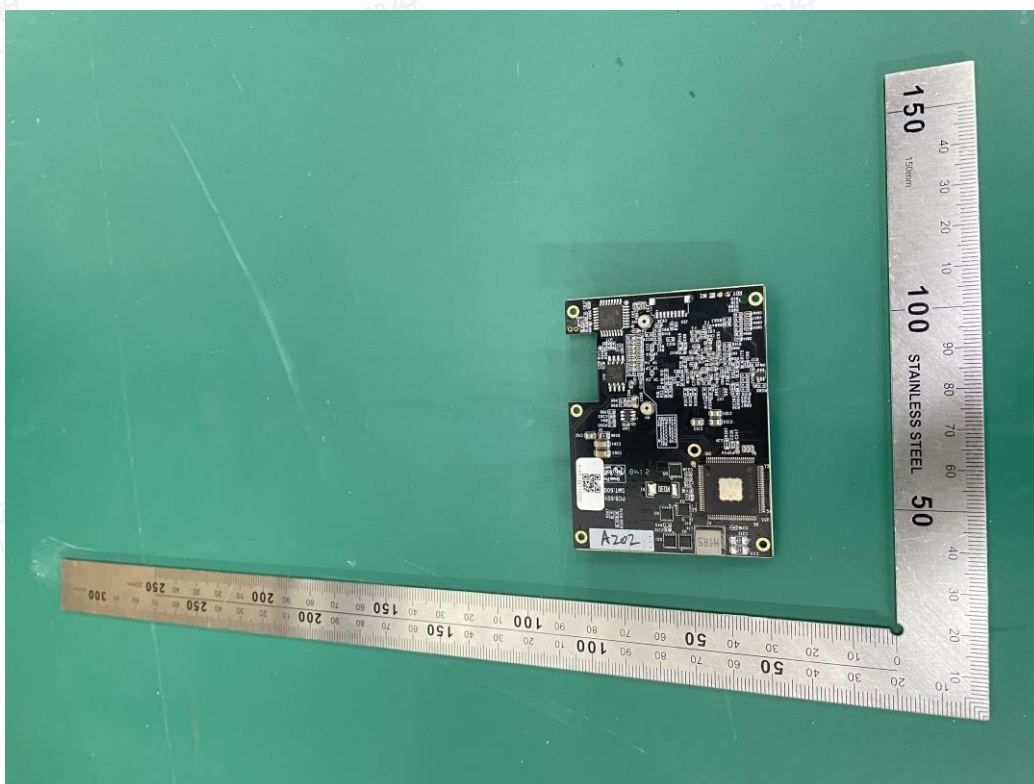


Figure. 12



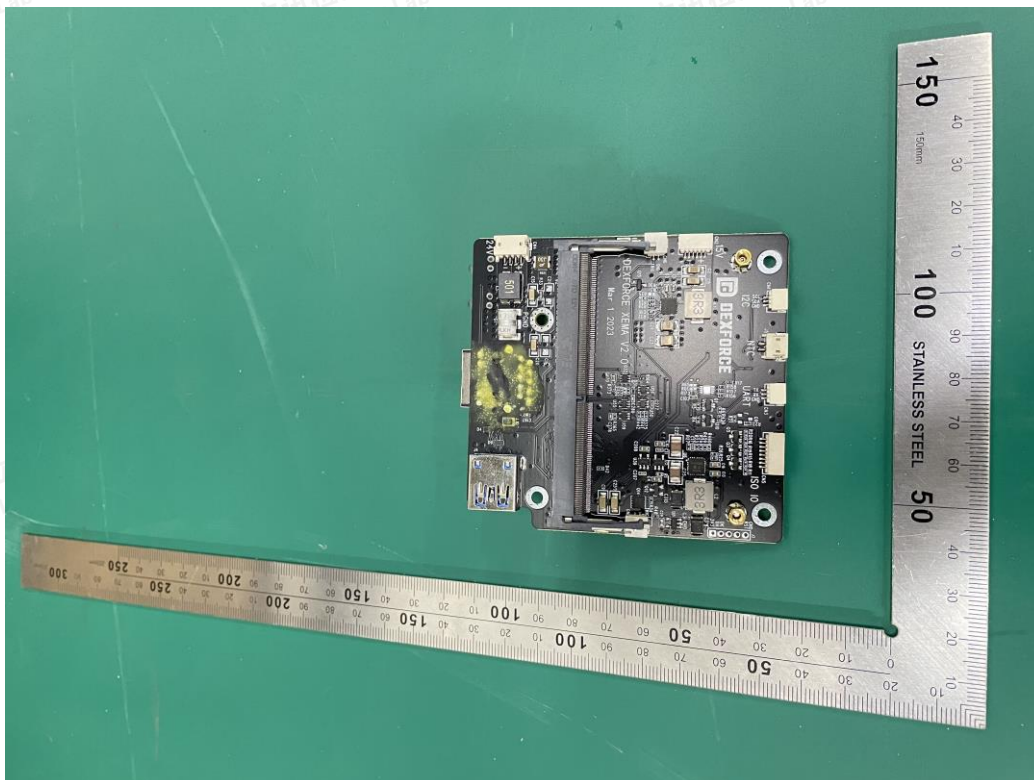


Figure. 13

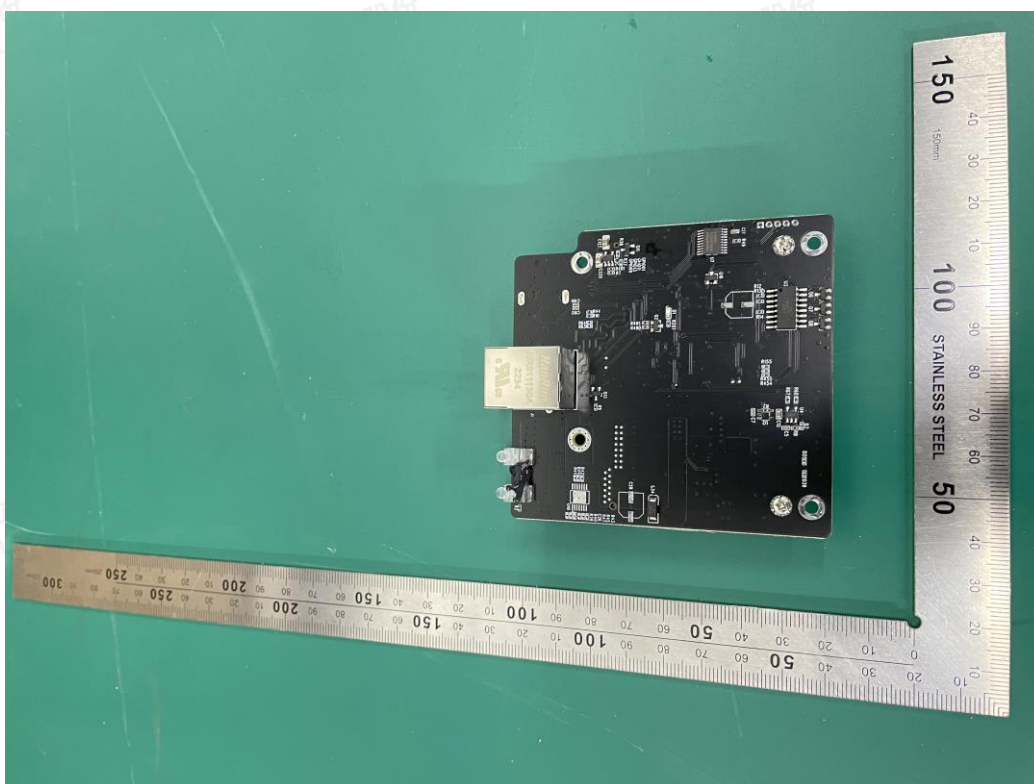


Figure. 14





Figure. 15

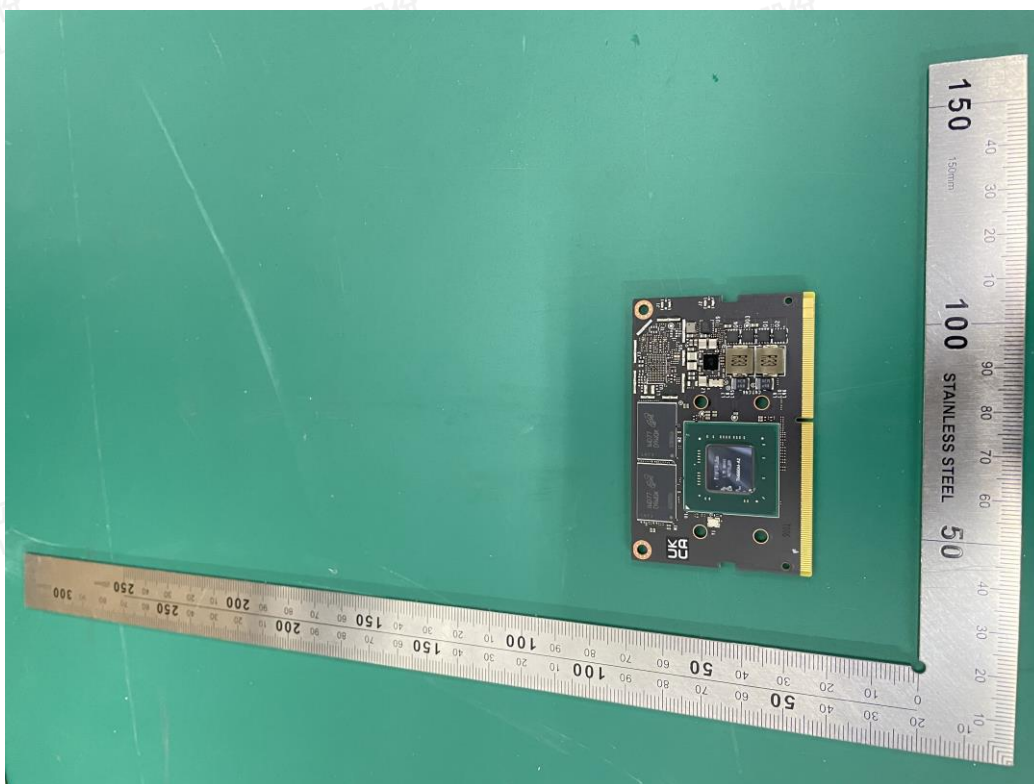


Figure. 16



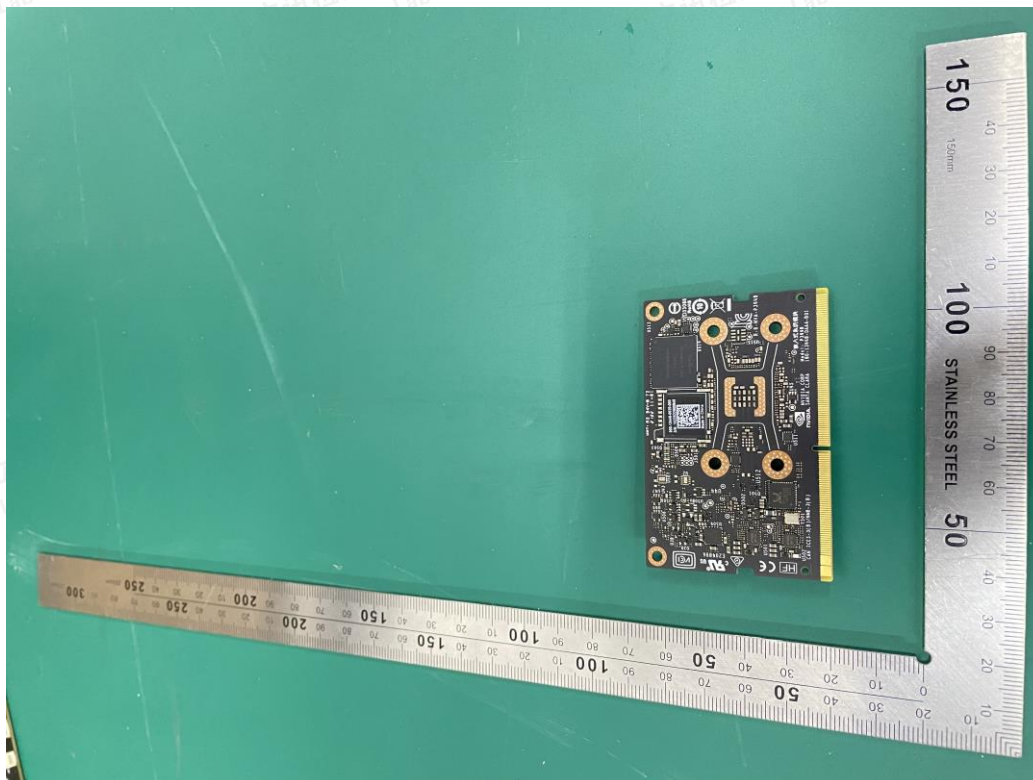


Figure. 17



Figure. 18





Figure. 19

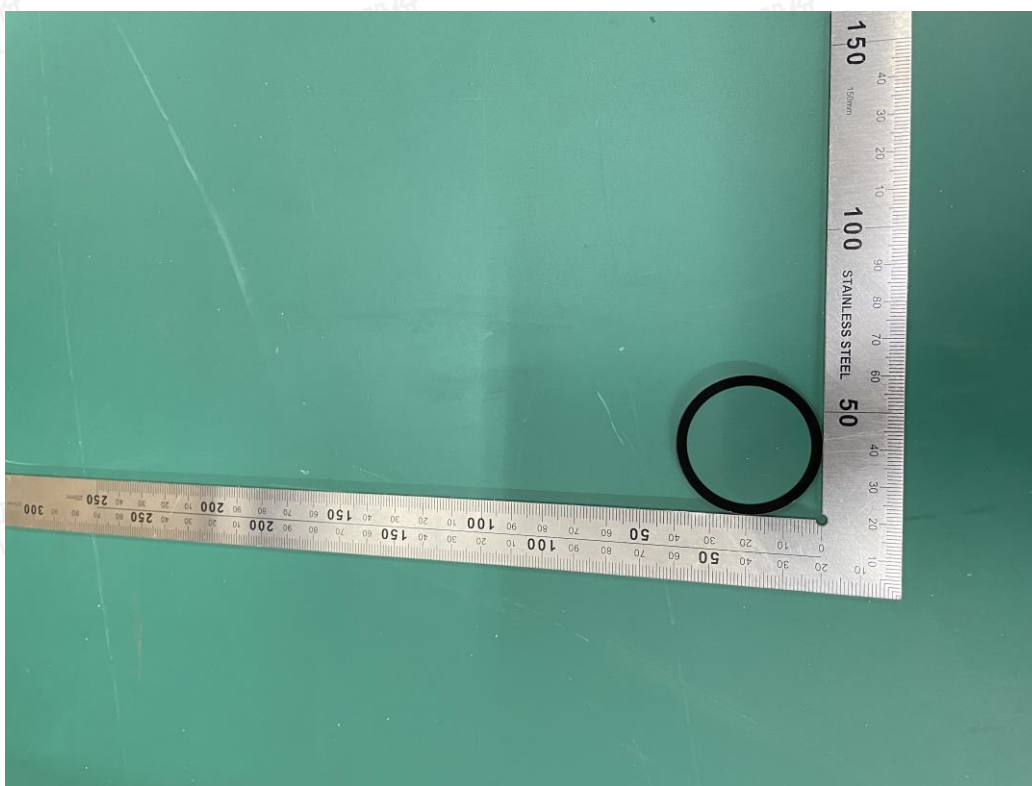


Figure. 20



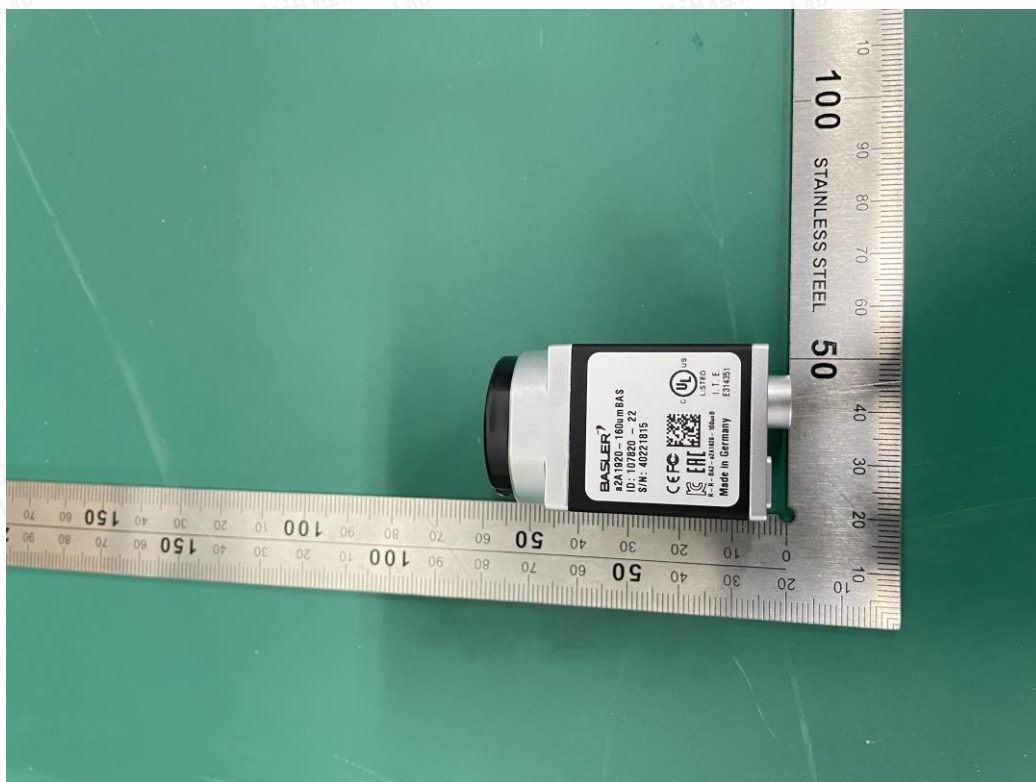


Figure. 21



Figure. 22



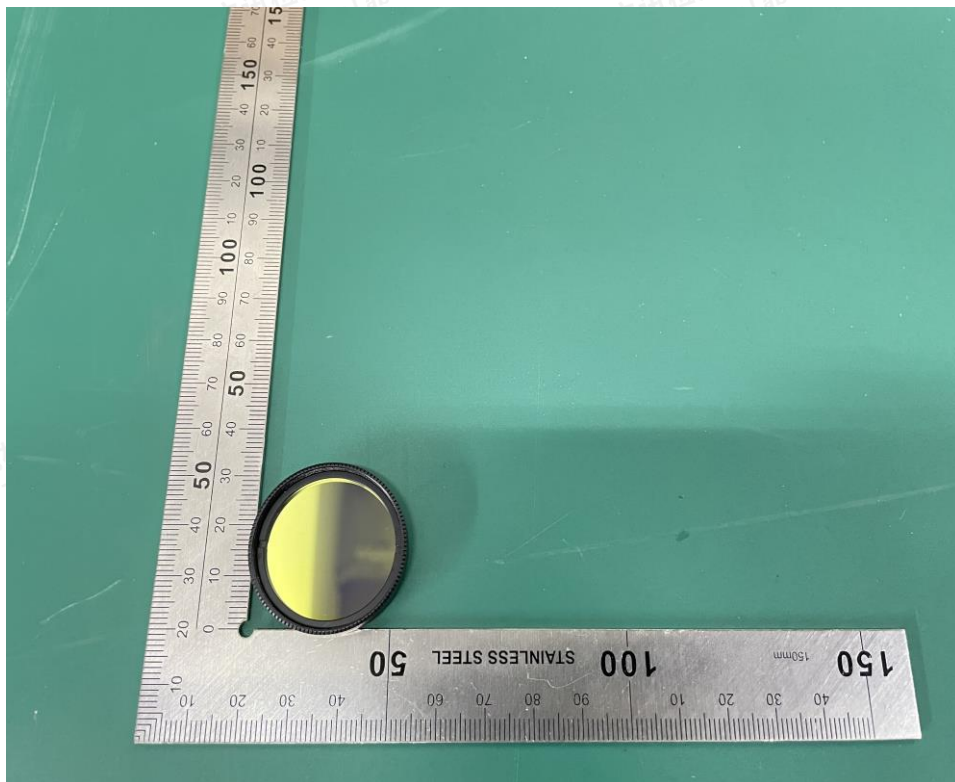


Figure. 23



Figure. 24



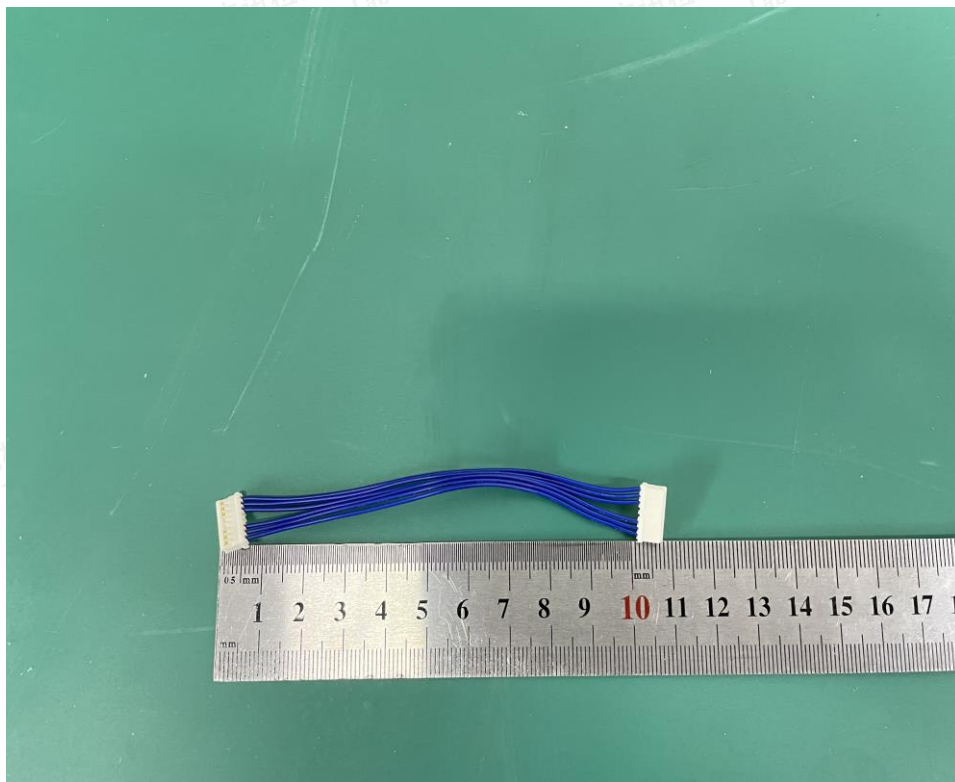


Figure. 25



Figure. 26



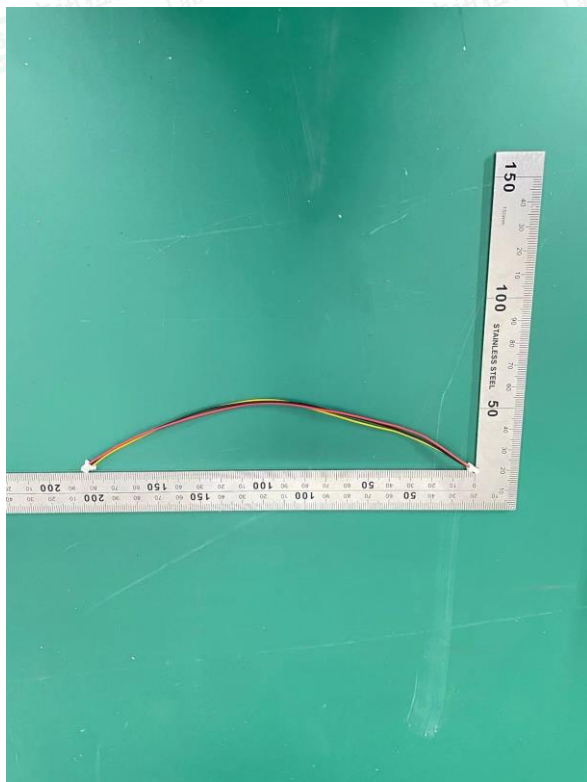


Figure. 27

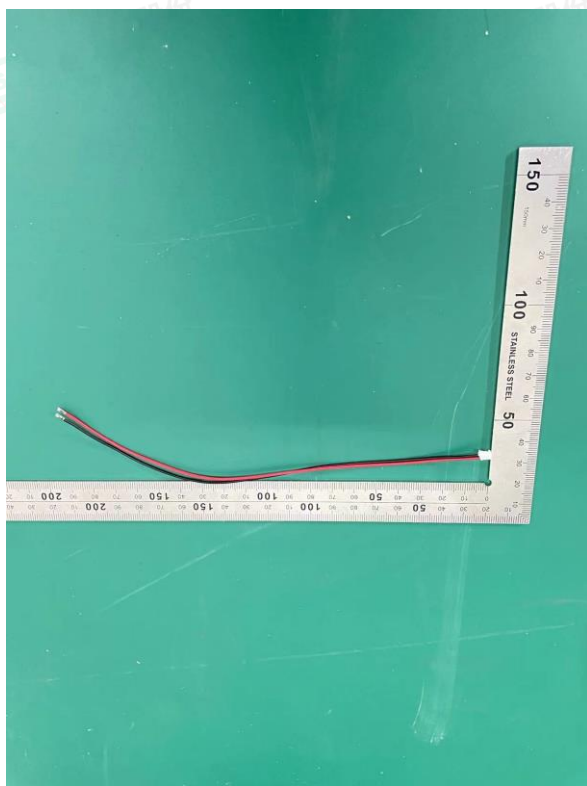


Figure. 28





Figure. 29



Figure. 30 (XMEA-P)





Figure. 31



Figure. 32 (XMEA-S)





Figure. 33



Figure. 34 (XMEA-S)





Figure. 35

----- END -----

